

## When does noise destroy or enhance synchronous behavior in two mutually coupled light-controlled oscillators?

G. M. Ramírez Ávila,<sup>1,2,3</sup> J. Kurths,<sup>1,2</sup> J. L. Guisset,<sup>4</sup> and J. L. Deneubourg<sup>4</sup>

<sup>1</sup>*Institut für Physik, Humboldt-Universität zu Berlin, Robert-Koch-Platz 4, 10115 Berlin, Germany*

<sup>2</sup>*Potsdam Institut für Klimafolgenforschung, P.O. Box 60 12 03, 14412 Potsdam, Germany*

<sup>3</sup>*Instituto de Investigaciones Físicas, Casilla 8635, Universidad Mayor de San Andrés, La Paz, Bolivia*

<sup>4</sup>*Interdisciplinary Center for Nonlinear Phenomena and Complex Systems and Unité d'Ecologie Sociale, CP 231,*

*Université Libre de Bruxelles, Campus de la Plaine, Bld. du Triomphe, Brussels, Belgium*

(Received 24 August 2010; revised manuscript received 23 September 2010)

We study the influence of white Gaussian noise in a system of two mutually coupled light-controlled oscillators (LCOs). We show that under certain noise intensity conditions, noise can destroy or enhance synchronization. We build some Arnold tonguelike structures in order to explain the effects due to noise. It is remarkable that noise-enhanced synchronization is possible only when the variances of the noise acting on each of the LCOs are different.

DOI: XXXX

PACS number(s): 05.45.Xt, 05.40.Ca, 85.60.Bt, 89.75.-k

Synchronization is a ubiquitous phenomenon present in natural systems and in manmade devices, which can be defined as an adjustment of rhythms in self-sustained oscillators due to their interaction [1]. Noise effects have been extensively studied and one of the more basic observations is that noise disturbs the coherent behavior of a system [2]. Furthermore, new insights about noise effects have been provided, such as stochastic resonance, in which, under certain circumstances, noise can help rather than hinder the performance of some devices [3], and it is possible to find its manifestations in a wide variety of systems such as optical [4], electronic [5], and biological [6] ones, especially in neuronal systems [7]. On the other hand, stochastic synchronization addresses the phenomenon of irregular phase locking between two noisy nonlinear oscillators or between a nonlinear oscillator and an external driving force [8]. The concepts of stochastic resonance and stochastic synchronization are closely related. A strong link between synchronization and noise has been found in the so-called noise-induced [9] and noise-enhanced [10] synchronization. The competition between noise and coupling in the induction of synchronization is discussed in [11]. A review of noise effects on chaotic systems is presented in [12].

In this work, we analyze the case in which the oscillators are influenced by  $\delta$ -correlated Gaussian noise characterized by their variances  $\sigma_i^2$ . The choice of noncommon noises is related to the fact that in some cases the subsystems have internal complex mechanisms with elements which are potentially sensitive to noise. Independent electronic devices are affected internally by noise whether in their active (e.g., power supply and diodes) or passive (e.g., resistors and capacitors) components. Our interesting result concerns the fact that in a system of two nonidentical pulse-coupled oscillators, the variances of the noise acting on each oscillator must be different in order to observe noise-enhanced synchronization.

Light-controlled oscillators (LCOs) are simple electronic devices that can be used to study realistic systems such as neurons, cardiac cells, and fireflies, among others, whose individual behavior follows an integrate-and-fire model. Our

system is composed of two noisy nonidentical mutually coupled LCOs that are relaxation oscillators whose (noise-free) natural periods  $T_{0i}$  are given by the sum of the durations of their charging  $t_{\lambda 0i}$  and discharging  $t_{\gamma 0i}$  stages. These time intervals are determined by the values of the electronic components:  $t_{\lambda 0i} = (R_{\lambda i} + R_{\gamma i}) C_i \ln 2 = \ln 2 / \lambda_i$  and  $t_{\gamma 0i} = R_{\gamma i} C_i \ln 2 = \ln 2 / \gamma_i$  [13]. Each LCO uses a voltage source  $V_{Mi}$  and is made up of photosensors and infrared light-emitting diodes, optoelectronic components that allow the LCO to interact with other LCOs by means of light pulses characterized by the coupling strength  $\beta_{ij}$  [14]. Additionally, an LM555 timer chip provides the LCO with the ability to oscillate, since it controls the charge and the discharge between an upper threshold ( $2V_{Mi}/3$ ) and a lower threshold ( $V_{Mi}/3$ ). Our scheme corresponds to parametric noise acting on the source voltage  $V_{Mi}$ , causing changes to the LCOs' amplitude signal that remains constant for non-noisy oscillators. The equation that describes the model for  $N$  LCOs is

$$\begin{aligned} \frac{dV_i(t)}{dt} = & \lambda_i \{ [V_{Mi} + \xi_i(t)\sqrt{D}] - V_i(t) \} \epsilon_i(t) - \gamma_i V_i(t) [1 - \epsilon_i(t)] \\ & + \sum_{i,j}^N \beta_{ij} \delta_{ij} [1 - \epsilon_j(t)], \end{aligned} \quad (1)$$

where  $\xi_i(t)$  represents a random number chosen from a normal distribution with mean zero and variance  $\sigma_i^2$ . The noisy term  $\xi_i(t)\sqrt{D}$  is determined by the noise variance  $\sigma_i^2$ , and  $\delta_{ij}$  indicates whether or not there is an interaction between LCO<sub>*i*</sub> and LCO<sub>*j*</sub>, such that  $\delta_{ij}=1$  when there is an interaction,  $\delta_{ij}=0$  when there is no interaction, and  $\delta_{ii}=0$  always, to denote no self-interaction. In Eq. (1), the oscillator state  $\epsilon_i(t)$  is defined by

$$\epsilon_i(t) = 1 \quad \text{extinguished LCO (charge),} \quad (5)$$

$$\epsilon_i(t) = 0 \quad \text{fired LCO (discharge),} \quad (6)$$

and the timer chip LM555 acts on the LCOs' states as

$$\text{If } V_i(t) = \frac{1}{3}[V_{Mi} + \xi_i(t)\sqrt{D}] \text{ and } \epsilon_i(t) = 0 \text{ then } \epsilon_i(t_+) = 1. \quad (8)$$

If  $V_i(t) = \frac{2}{3}[V_{M_i} + \xi_i(t)\sqrt{D}]$  and  $\epsilon_i(t) = 1$  then  $\epsilon_i(t_+) = 0$ .

$$\Delta\Phi_{12}^{\text{linear}} = \phi_2(t_1^{(k+1)}) - \phi_1(t_1^{(k+1)}) = 2\pi \frac{t_2^{(k+1)} - t_1^{(k+1)}}{t_2^{(k+1)} - t_2^{(k)}}, \quad (3)$$

The usual values taken for the LCOs give a ratio of around 2% between the discharging time and the charging one. This small value for the ratio indicates that we have two time scales, a typical characteristic of relaxation oscillators. In order to study the synchronization features of our system, we define the instantaneous phase of an LCO (with label  $i$ ) in accordance with the Poincaré map method [1,15] as  $\phi_i(t) = 2\pi(t - t_i^{(k)}) / (t_i^{(k+1)} - t_i^{(k)}) + 2\pi k$ ; with this, we can compute the instantaneous linear phase difference (LPD) with stroboscopic observation between the LCOs as

$$\Delta\Phi_{12}^{\text{linear}} = \phi_2(t_1^{(k+1)}) - \phi_1(t_1^{(k+1)}) = 2\pi \frac{t_2^{(k+1)} - t_1^{(k+1)}}{t_2^{(k+1)} - t_2^{(k)}}, \quad (3)$$

where  $t_i^{(k+1)}$  is the time at which the  $(k+1)$ th firing event of LCO $_i$  takes place. The above expression gives the appropriate result in the case of LCOs whether the oscillations are merely periodic or if they are disturbed by noise, since we can consider the beginning of the flashing events as the points lying on the Poincaré section in the phase space. The normalization of the phase differences in the circle  $[0:1]$  allows us to obtain the cyclic phase difference (CPD) defined as

$$\Delta\phi_{12}^{\text{cyclic}} = \frac{1}{2\pi} [\Delta\Phi_{12}^{\text{linear}} \bmod 2\pi]. \quad (4)$$

Using Eqs. (1) and (3) we have studied the influence of  $\delta$ -correlated Gaussian noise on two mutually coupled LCOs. In Eq. (1), we can associate  $\sqrt{D}$  to the noise intensity that we have varied in the interval  $[0.0, 2.0]$ . In the case of two mutually coupled LCOs, the width of the synchronization region is directly proportional to the coupling strength for 1:1 synchronization [13], and we expect that in this region the mean frequencies of the LCOs in the presence of coupling are roughly the same, i.e.,  $\langle\Omega_1/\Omega_2\rangle \approx 1$  [16]. Synchronization domains can be determined, as shown in Fig. 1, using statistical criteria such as the LPD mean value ( $\langle\text{LPD}\rangle$ ) or the CPD variance ( $\text{var}_{\text{CPD}}$ ) [17].

First, we consider two nonidentical LCOs with parameter values  $T_{01} = 34.0$  ms and  $T_{02} = 32.5$  ms, which—in the absence of noise—synchronize for  $\beta \gtrsim 400$ ; this result has been obtained by computing the 1:1 Arnold tongue for this system. When Gaussian noise acts on the LCOs, we observe that the system desynchronizes for determined values of noise intensity (Fig. 1).

In Fig. 1(a) the  $\langle\text{LPD}\rangle$  as a function of noise intensity is shown for three values of coupling strength  $\beta$  and when the LCO's noise variances are such that  $\sigma_1^2 < \sigma_2^2$ . We see that the noise destroys the synchronous regime ( $\langle\text{LPD}\rangle \approx 0$ ) for increasing noise intensities. On the other hand, this effect is less important when the coupling strength increases. Using  $\text{var}_{\text{CPD}}$ , it is possible to determine the synchronization region as well [Fig. 1(b)]; in this case,  $\text{var}_{\text{CPD}} \approx 0$  in the synchronous regime and  $\text{var}_{\text{CPD}} \approx 0.083$  when the system is not synchronized. Taking a noise intensity value included in the synchronization region for a specific coupling strength and

representing the LPD evolution and the CPD probability distribution, we verify that the LPD remains almost constant [Fig. 1(c)], and the CPD distribution has a well-defined maximum [Fig. 1(f)]. For a greater noise intensity value, the system leaves the synchronous regime, the LPD drops via several phase slips [Fig. 1(d)], and the CPD distribution splits with a tendency toward a uniform distribution [Fig. 1(g)]. If the noise intensity value is still greater, we find that the LPD evolution drops [Fig. 1(e)] as in the case of non-identical uncoupled LCOs with  $T_{01} > T_{02}$  [17], and the CPD distribution becomes almost uniform [Fig. 1(h)] showing the signature of an asynchronous regime. Finally, Figs. 1(i) and 1(j) show the synchronization regions when  $\sigma_1^2 > \sigma_2^2$ . In this case, noise does not affect the system considerably, i.e., the system remains synchronous for a wide interval of noise intensity values.

Only high noise intensity values produce LCOs synchrony loss via phase slips [Fig. 1(l)]; when the synchrony is totally lost, the LPD grows in time as in the case of uncoupled LCOs with  $T_{01} < T_{02}$  [17] [Fig. 1(m)]. This means that noise induces a decreasing period in LCO $_1$ , a situation that can be easily understood since noise is high and, consequently, the thresholds will be more rapidly reached. The  $\text{var}_{\text{CPD}}$  criterion shows some regions in which  $\text{var}_{\text{CPD}} \neq 0$  [Fig. 1(j)]. Nevertheless, the corresponding LPD evolution and the CPD distribution show that synchronization is still present [Figs. 1(k) and 1(n)].

Determining the synchronization regions as above, we can construct Arnold tonguelike structures (Fig. 2). If the noise variance of the LCO with lower period (LCO $_2$ ) is greater or equal to that of the LCO with higher period (LCO $_1$ ), then the synchronous regime is disturbed by noise and, obviously, the higher the noise intensity, the greater the noise influence over the system, and this fact can drive the system to leave the synchronous state (Fig. 2). Moreover, the noise influence is more important when the difference between noise variances is larger and the coupling strength is less [Figs. 2(a) and 2(c)]. The relationship between the noise intensity ( $\sqrt{D}$ ) and the coupling strength ( $\beta$ ) computed at the boundary line separating synchronous and asynchronous regions is almost linear. On the other hand, when the noise variance of the LCO with lower period (LCO $_2$ ) is less than that of the LCO $_1$ , the synchronous regime is only destroyed for high values of noise intensity [Figs. 2(b) and 2(d)]. One of the differences with respect to the case in which  $\sigma_1^2 \leq \sigma_2^2$  is the fact that the slope of the boundary line separating synchronous and asynchronous regions is considerably lower for  $\sigma_1^2 > \sigma_2^2$  [Figs. 2(b) and 2(d)] where the slope of the boundary line is almost null. For equal noise variances ( $\sigma_1^2 = \sigma_2^2$ ), we see that the synchronous regime withstands better the noise effects with respect to the case in which  $\sigma_1^2 < \sigma_2^2$ , in the sense that the synchronization regions are wider [Figs. 2(a) and 2(c)], despite the fact that  $\sigma_1^2$  is greater.

Until now, we have considered the noise effects tending to desynchronize the system. Nevertheless, noise may also enhance synchrony when the LCOs do not synchronize in noise-free situations. As was shown above, it is possible to determine synchronization regions using  $\langle\text{LPD}\rangle$ . Now, if we consider the same system of two mutually coupled LCOs but in a situation in which the LCOs do not synchronize

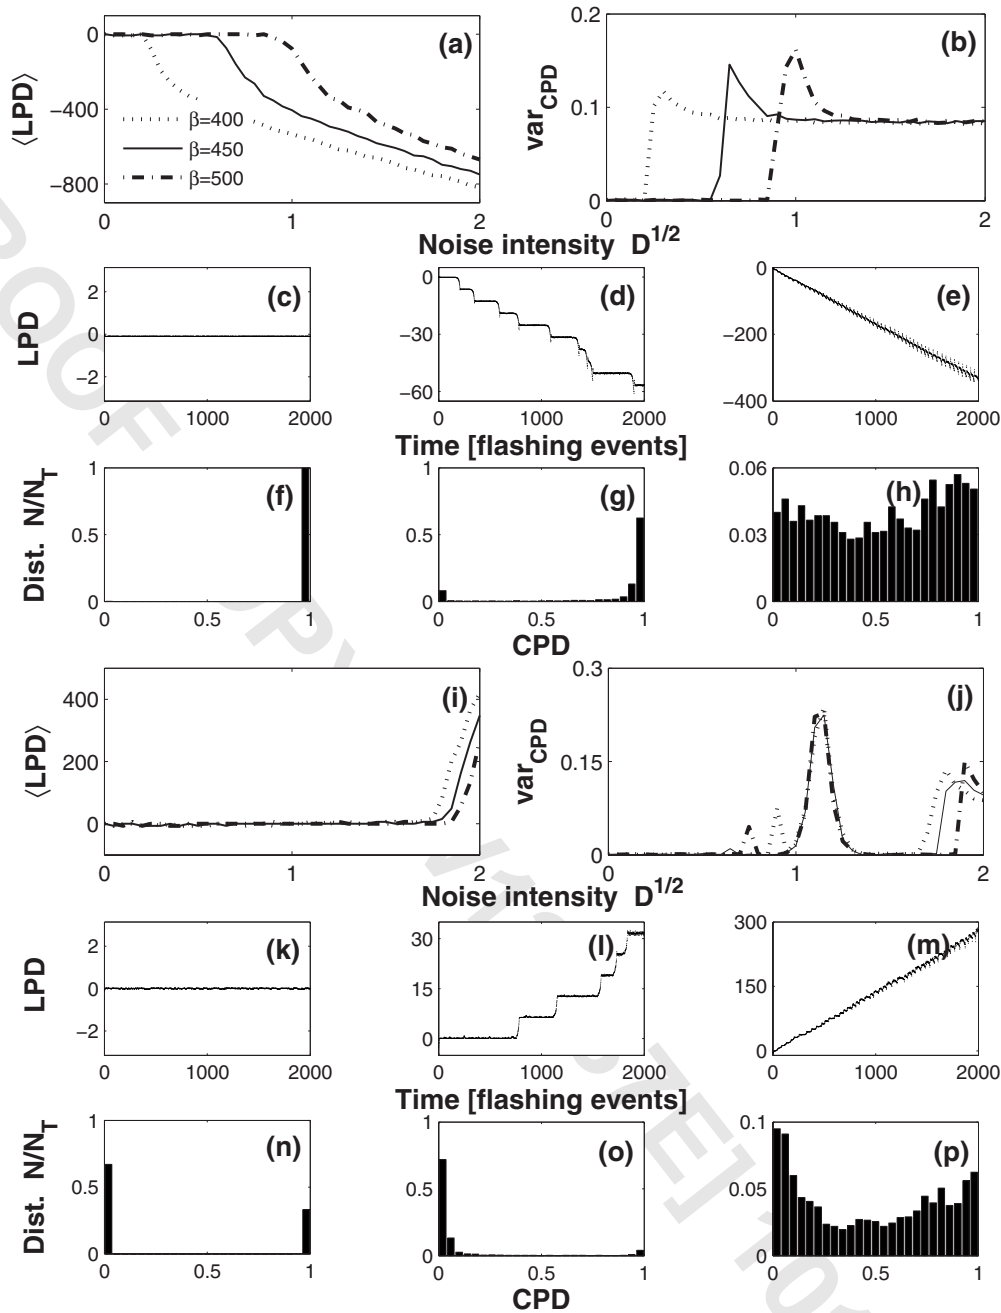


FIG. 1. Determining synchronization regions for two nonidentical noisy LCOs and different coupling strengths using as criterion [(a) and (j)] the LPD mean value and [(b) and (i)] the CPD variance as a function of the noise intensity. The LCOs' noise variances are (a)–(h)  $\sigma_1^2=0.0005$  and  $\sigma_2^2=0.001$ , and (i)–(p)  $\sigma_1^2=0.003$  and  $\sigma_2^2=0.0003$ . For a determined coupling strength ( $\beta=450$ ), the corresponding LPD evolution and the CPD distribution are represented for different noise intensities: (c) and (f)  $\sqrt{D}=0.20$ , (d) and (g)  $\sqrt{D}=0.65$ , (e) and (h)  $\sqrt{D}=1.00$ , (k) and (n)  $\sqrt{D}=1.15$ , (l) and (o)  $\sqrt{D}=1.80$ , and (m) and (p)  $\sqrt{D}=2.00$ .

201 ( $\beta \lesssim 400$ ), we note that the presence of independent noises  
 202 can drive the system to a statistical synchronous state for  
 203 certain noise intensity values (Fig. 3). For defined noise vari-  
 204 ances, the synchronization region enlarges with the increas-  
 205 ing of  $\beta$  [Figs. 3(a) and 3(b)]. From Fig. 3(c) we observe that  
 206 for a determined value of  $\beta$ , the noise variances modify the  
 207 synchronization region in such a way that for increasing val-  
 208 ues of  $\sigma_2^2$ , the beginning of the synchronization region shifts  
 209 toward greater values of noise intensity and the region be-  
 210 comes larger. Nevertheless, Fig. 3(d) shows that as  $\sigma_2^2$  tends

toward  $\sigma_1^2$ , the synchronization region vanishes. Hence, the  
 condition  $\sigma_1^2 > \sigma_2^2$  must be fulfilled in order to enhance syn-  
 chronization.

Depending on the noise intensity values, the system re-  
 mains in an asynchronous regime or it achieves a synchron-  
 ous one. However, if the noise intensity is still greater, the  
 system desynchronizes again but with the characteristic that  
 the LCOs' periods behave in such a way that  $T_1 < T_2$ .

The shape of the curves in Figs. 3(a) and 3(c) exhibits a  
 great resemblance to the typical curves obtained from fre-

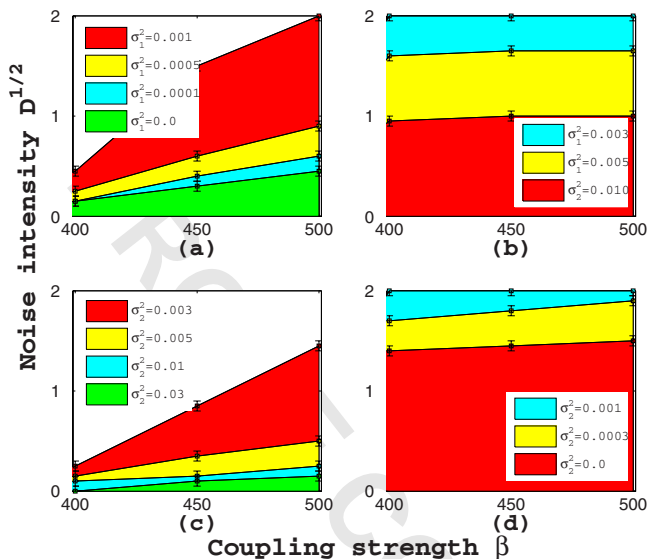


FIG. 2. (Color online) Patches representing synchronization regions for different noise variances. (a)  $\sigma_2^2 \geq \sigma_1^2$ , (b)  $\sigma_2^2 < \sigma_1^2$ , with  $\sigma_2^2=0.001$ ; (c)  $\sigma_1^2 \leq \sigma_2^2$ , (d)  $\sigma_1^2 > \sigma_2^2$ , with  $\sigma_1^2=0.003$ .

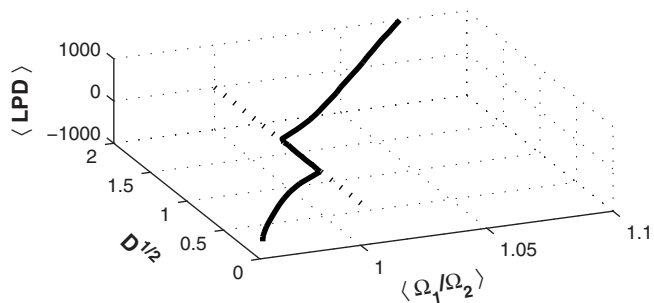


FIG. 4.  $\langle \text{LPD} \rangle$  as a function of noise intensity  $\sqrt{D}$  and the mean coupling frequency ratio  $\langle \Omega_1/\Omega_2 \rangle$ . The values for noise variances are  $\sigma_1^2=0.003$  and  $\sigma_2^2=0.0003$ , and for the coupling strength  $\beta=166$ .

ratio is  $\langle \Omega_1/\Omega_2 \rangle \approx 1$ , confirming again that this region corresponds to a synchronous one.

As stated above, we can construct Arnold tonguelike structures to denote the synchronization regions for different coupling strengths  $\beta$  and show how the noise enhances synchronization (Fig. 5). The underlying mechanism that permits noise-enhanced synchronization is related to the fact that for strong noise intensities there is a considerable contraction in the phase space, and also the amplitude of one of the LCOs decreases.

In conclusion, we have shown that we can determine the synchronization regions of coupled LCOs using statistical parameters linked to the LPD, in particular the mean value as a function of the noise intensity exhibits the same shape that is found in frequency difference vs frequency mismatch plots. As was expected, inside the synchronization regions, the LPD remains almost constant in time and the corresponding probability distribution has a well-defined peak. Moreover,  $\langle \text{LPD} \rangle \approx 0$  is associated to  $\langle \Omega_1/\Omega_2 \rangle \approx 1$ .  $\delta$ -correlated Gaussian noise can destroy synchronous regimes, and this

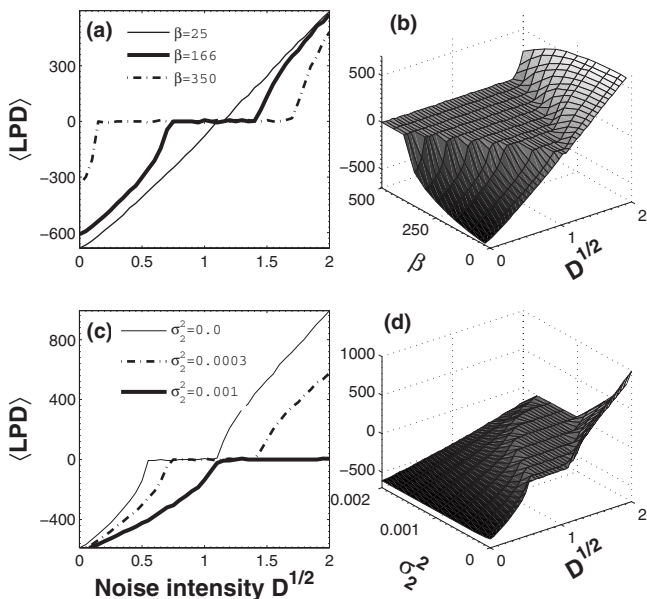


FIG. 3. (a) Synchronization regions for specific values of  $\beta$  with  $\sigma_1^2=0.003$  and  $\sigma_2^2=0.0003$  and (b) its generalization in a surface. (c) Synchronization regions for different LCO<sub>2</sub> noise variances  $\sigma_2^2$  with  $\sigma_1^2=0.003$  and  $\beta=166$  and (d) its generalization in a surface.

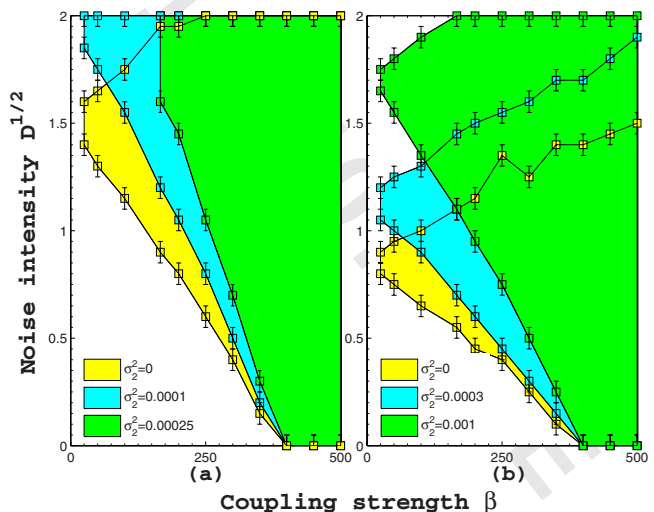


FIG. 5. (Color online) Patches representing synchronization regions for different noise variances. (a)  $\sigma_1^2=0.001$  and (b)  $\sigma_1^2=0.003$ .

252 effect is more significant if the noise variance of the lower  
 253 period LCO is greater than that corresponding to the other  
 254 LCO. Noise-enhanced synchronous regimes are possible  
 255 when the noise variance of the higher-period LCO is greater  
 256 than that of the other LCO. The synchronization regions can  
 257 be characterized by means of Arnold tonguelike structures  
 258 onto the  $\beta\text{-}\sqrt{D}$  plane. The last allows us to link the concepts  
 259 of frequency and noise intensity, i.e., noise acts principally at

the level of frequency modification permitting the change of 260  
 regime (synchronous-asynchronous and vice versa) in the 261  
 system of coupled LCOs. 262

G.M.R.A. is supported by the German Academic Ex- 263  
 change Service (DAAD). J.K. acknowledges the projects 264  
 ECONS (WGL) and SUMO (EU). We thank D. Sanders for 265  
 careful reading of the manuscript. 266

267  
 268  
 269

- [1] A. Pikovsky, M. Rosenblum, and J. Kurths, *Synchronization: A Universal Concept in Nonlinear Sciences* (Cambridge University Press, New York, 2001). 270  
 271  
 272  
 [2] S. H. Strogatz and R. E. Mirollo, *J. Stat. Phys.* **63**, 613 (1991); 273  
 274 J. Theiler, S. Nichols, and K. Wiesenfeld, *Physica D* **80**, 206  
 275 (1995).  
 [3] C. Nicolis, *Tellus* **34**, 1 (1982); B. McNamara and K. Wiesen- 276  
 277 feld, *Phys. Rev. A* **39**, 4854 (1989); P. Hänggi, P. Jung, C.  
 278 Zerbe, and F. Moss, *J. Stat. Phys.* **70**, 25 (1993); G. Nicolis, C.  
 279 Nicolis, and D. McKernan, *ibid.* **70**, 125 (1993); K. Wiesen-  
 280 feld and F. Moss, *Nature (London)* **373**, 33 (1995); L. Gam-  
 281 maitoni, P. Hänggi, P. Jung, and F. Marchesoni, *Rev. Mod.*  
 282 *Phys.* **70**, 223 (1998).  
 [4] J. Grohs, S. Apanasevich, P. Jung, H. Issler, D. Burak, and C. 283  
 284 Klingshirn, *Phys. Rev. A* **49**, 2199 (1994); B. McNamara, K.  
 285 Wiesenfeld, and R. Roy, *Phys. Rev. Lett.* **60**, 2626 (1988).  
 [5] L. Gammaitoni, M. Martinelli, L. Pardi, and S. Santucci, *Phys.* 286  
 287 *Rev. Lett.* **67**, 1799 (1991); M. Locher, G. A. Johnson, and E.  
 288 R. Hunt, *ibid.* **77**, 4698 (1996).  
 [6] J. M. G. Vilar and R. V. Sole, *Phys. Rev. Lett.* **80**, 4099 289  
 290 (1998); S. Bahar, A. Neiman, L. A. Wilkens, and F. Moss,  
 291 *Phys. Rev. E* **65**, 050901(R) (2002).  
 [7] A. Longtin, A. Bulsara, and F. Moss, *Phys. Rev. Lett.* **67**, 656 292  
 293 (1991); T. Shimokawa, K. Pakdaman, and S. Sato, *Phys. Rev.*  
 294 *E* **60**, R33 (1999); T. Shimokawa, A. Rogel, K. Pakdaman,  
 295 and S. Sato, *ibid.* **59**, 3461 (1999).  
 [8] D. R. Chialvo, O. Calvo, D. L. Gonzalez, O. Piro, and G. V. 296  
 297 Savino, *Phys. Rev. E* **65**, 050902(R) (2002); S. Bahar and F.  
 Moss, *Math. Biosci.* **188**, 81 (2004); T. Zhou, L. Chen, and K. 298  
 Aihara, *Phys. Rev. Lett.* **95**, 178103 (2005). 299  
 [9] C. Zhou and J. Kurths, *Phys. Rev. Lett.* **88**, 230602 (2002). 300  
 [10] C. Zhou, J. Kurths, I. Z. Kiss, and J. L. Hudson, *Phys. Rev.* 301  
 302 *Lett.* **89**, 014101 (2002).  
 [11] D. García-Álvarez, A. Bahraminasab, A. Stefanovska, and P. 303  
 304 V. E. McClintock, *EPL* **88**, 30005 (2009).  
 [12] S. Boccaletti, J. Kurths, G. Osipov, D. L. Valladares, and C. S. 305  
 306 Zhou, *Phys. Rep.* **366**, 1 (2002).  
 [13] G. M. Ramírez Ávila, J. L. Guisset, and J. L. Deneubourg, 307  
 308 *Physica D* **182**, 254 (2003); *Proceedings of the 11th Interna-*  
 309 *tional IEEE Workshop on Nonlinear Dynamics of Electronic*  
 310 *Systems*, edited by R. Stoop (Scuol, Switzerland, 2003), p. 201. 310  
 [14] Due to the features of the pulse coupling, the effective cou- 311  
 312 pling strength acting on the LCO<sub>i</sub> through the action of the  
 LCO<sub>j</sub> results from multiplying  $\beta_{ij}$  by the duration of the LCO<sub>j</sub> 313  
 light pulse,  $t_{\gamma j}$ . For instance, using typical experimental values, 314  
 $\beta_{ij} \approx 400$  and  $t_{\gamma j} \approx 0.5 \times 10^{-3}$ , the effective coupling strength is 315  
 approximately 0.2. The dependence of  $\beta_{ij}$  on the distance be- 316  
 tween LCOs has been experimentally determined in [13]. 317  
 [15] A. Neiman, X. Pei, D. Russell, W. Wojtenek, L. Wilkens, F. 318  
 319 Moss, H. A. Braun, M. T. Huber, and K. Voigt, *Phys. Rev. Lett.*  
**82**, 660 (1999). 320  
 [16] It is clear that the use of frequencies or periods is equivalent. 321  
 [17] G. M. Ramírez Ávila, J. L. Guisset, and J. L. Deneubourg, *Int.* 322  
 323 *J. Bifurcation Chaos* **17**, 4453 (2007).  
 [18] C. Schäfer, M. G. Rosenblum, H. H. Abel, and J. Kurths, *Phys.* 324  
 325 *Rev. E* **60**, 857 (1999).